



# Lamdoor

## Double Swing Ambulant WC Door Systems

---


### LSDA

- Lamdoor
- Single Door
- Double Swing
- Ambulant WC



### LUDA

- Lamdoor
- Unequal Pair
- Double Swing
- Ambulant WC

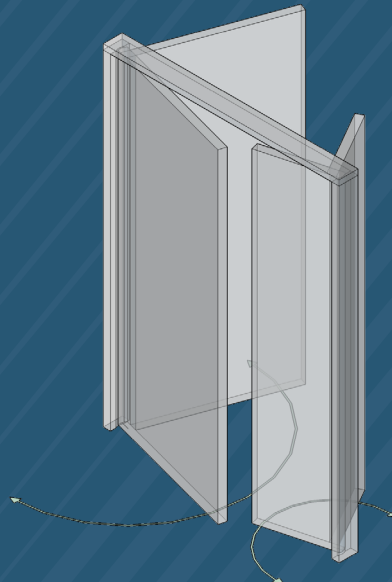

# SDS Door Systems Explained

Every year thousands of brand-new fire doors have their certification invalidated from the moment they are fitted! Mostly this happens inadvertently but is hardly surprising when you consider that a compliant fire door is not just a door and frame. In order for a fire door to be compliant – the door leaf, the glazing, the door frame, the ironmongery, the fixings, the fire stopping materials, the intumescent products and the fire signage must not only be compatible, but must also be backed up with fire test evidence to prove the use of all components when fitted together. The most common mistake amongst the fire industry is to assume that an individual component with fire test evidence can automatically be fitted to a fire door. Sadly, this is not the case, and as a result many fire doors – although they are made up of fire rated components – are not fire compliant as a complete assembly.

At Specialist Door Solutions, we have created a number of Door Systems which have been compiled based on our experience in the industry and are designed to offer a one-stop solution for compliant high-performance doorsets comprising of doors, frames, vision panels and ironmongery solutions, all of which are fully backed up by the relevant test data and certification.



# The LSDA & LUDA Door Systems

The **LSDA & LUDA** Door Systems are designed specifically for inward opening Ambulant WC's. These systems are designed to allow the door to swing outwards in the event of a patient falling or requiring assistance. An inward opening door would often restrict this from being possible, so the option to open the door outwards is extremely critical, as outlined in Building Regulations Approved Document M.

The **LSDA & LUDA** Door Systems are all part of the Lamdoor range of doors. The SDS Lamdoor plugs the gap between a traditional Laminate faced door and the SDS Dfendoor, offering a long lasting yet commercially viable alternative.

The SDS Lamdoor range has a very comprehensive range of glazing options, colour options, door leaf sizes, and also offers the ability to customise with items such as edge protectors and kickplates. These details are explained in more detail in the following pages.

## Operational / Warranty

A resilient, hard wearing, and hygienic doorset. Lamdoor doors are supplied encapsulated with 1.5mm thick PVC, and are designed for less demanding healthcare environments, pharmaceutical, hospitality, retail and education sectors. Supplied with 5 Year Warranty.

## Fire Rating Options

- NFR – No Fire Rating
- FD30 – 30 Mins Fire Resistance
- FD30s – Not available on double swing doors
- FD60 – 60 Mins Fire Resistance
- FD60s – Not available on double swing doors

## Acoustic Performance

- 0 – 20dB – without any acoustic seals
- 21+ dB – Not available on LSDA or LUDA systems

## Enviromental

Formaldehyde Release Rating Class E1, according to BS EN 13986(2004).  
FSC Certified – Certificate Registration No. SA-COC-005235.

# Maximum Leaf Sizes

Here are the maximum leaf sizes available for the **LSDA & LUDA** Door systems. These sizes are based on our primary fire test evidence.

Maximum sizes are noted for both the width and height of the door, as the width and height of a door are relative to each other. A very wide door is restricted by height, and a very tall door is restricted in width.

When a fire test is carried out – a door without a lock or latch is considered more onerous than a door with a latch. The reason for this is that the latch serves to hold the door in the closed position against the pressure build up within the furnace. This therefore creates two categories of permissible door sizes – those tested with a latch and those tested without a latch. All **LSDA & LUDA** door systems are designed to include a latch. Therefore the sizes below reflect this:

Note: **LUDA** door sizes refer to the main leaf


		Height	Width
<div>LSDA Doors</div> <div></div>	NFR - With or Without Latch	2100	950
	FD30 - With or Without Latch	2100	950
	FD60 - With or Without Latch	2100	950
<div>LUDA Doors</div> <div></div>	NFR - With or Without Latch	2100	950
	FD30 - With or Without Latch	2100	950
	FD60 - With or Without Latch	2100	950

# Vision Panels

No Vision Panel options are available on the **LSDA & LUDA** door systems as these systems are intended for WC's.


# Door Edges

All door edges on the **LSDA & LUDA** Door Systems are Postformed. This means that the PVC sheets on the faces of the doors are heated up and formed around the edges of the door. This provides the ultimate solution for both impact protection and hygiene, as there are no joints, no unprotected edges, and no loose components. The joint between the two faces of PVC is fitted with an intumescent strip.



# Frame Types

The following frame type is used on the **LSDA & LUDA** Door Systems;

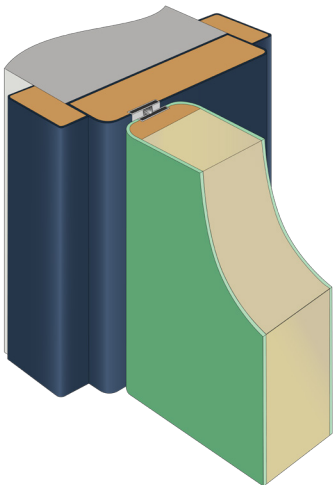Frame Type	Image	Comments	Notes	Wall Depths
Double Swing Offset		A Traditional style frame with separate architraves.	This type of frame is designed specifically for the <b>LSDA &amp; LUDA</b> door systems. The door sits flush with the face of the frame rather than centrally like other double swing doors, and is designed to allow an Emergency Release Door Stop to be fitted within the frame reveal to allow the door to open in reverse in the event of an emergency. Frame fixings are normally placed within the intumescent groove, and the architraves are supplied with loose PVC covers to conceal fixings, thus giving a completely fixing-free finish.	90 – 190mm  Extension lining available for reveals deeper than 190mm

# Finishes

All of the following colours are available on the **LSDA & LUDA** Door Systems. Doors and frames can be in the same colour, or in contrasting colours.

## Woodgrains



American White Oak  
LRV: 43

Ellmau Beech:  
LRV 46


## Coloured Finishes



Flint:  
LRV 21: RAL 7037

Gunpowder:  
LRV 51: RAL 7035

Snowflake:  
LRV 81: RAL 9003

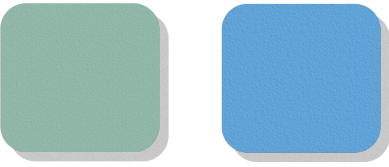

Jade:  
LRV 36

Lupin:  
LRV 23: RAL 5024

# Ironmongery Sets

There's no hiding it - ironmongery is sometimes one of the most complicated aspects of a doorset. Apart from ensuring all components of an ironmongery set are compatible - there's also Fire Regulations, Fire Certification, HTM Compliance, DDA Compliance and Building Regulations to consider!

Here at Specialist Door Solutions we have combined our many years of experience with doors and ironmongery in the healthcare sector, and created an industry pioneering range of 'Standard Ironmongery Sets'. All of these standard sets are 100% compliant with all of the above mentioned regulations, and are designed to take the hard work out of choosing ironmongery - whilst still offering a huge range of options.

Here's a few notes about what's in these sets, and on the following pages you will find full details of the ironmongery sets, listed under the relevant Door Systems.

# Ironmongery Finishes

We offer our ironmongery sets in 3 finishes - each designed to offer different levels of hygiene. All of these different finishes are brushed stainless steel in appearance making them visually the same. This makes it possible to mix-and-match different ironmongery finishes in different areas of a project, according to the clinical sensitivity of the room/area.

- Define Range - Stainless Steel

Made from Stanless Steel - this is our Go-To option for most doorsets. Stainless Steel is extremely tough and offers excellent corrosion resistance to most oxidising acids making it easy to sanitise - ideal for the rigorous demands of hospital environments.

- Define+ Range - Anti-Microbial


A range of ironmongery with an Anti-Microbial coating containing silver ions. The silver ions in the coating continuously fight against harmful bacteria by disrupting the bacteria's metabolism which inhibits its survival and reproduction. The coating is extremely tough and remains operative even when subjected to the normal cleaning regimes of a hospital. Note - only 'touch-point' items will be coated. This includes Pull Handles, Push Plates, Lever Handles, Escutcheons and Bathroom Thumbturns. Where an ironmongery set is specified as Anti-Microbial, all 'non-touch-point' items will be Stainless Steel. Please also note, Digi-Locks are not available in Anti-Microbial finish.

- Define Copper Range - Copper Nickel

A range of ironmongery made from solid copper alloy. The key difference with this range is that it is not coated - it is made from solid copper alloy which continuously kills 99.9% of harmful bacteria, whilst maintaining the clinical aesthetic of stainless steel. Copper is the first and only elemental solid surface material registered with the U.S. Environmental Protection Agency to actively kill bacteria. The antibacterial properties work 24/7, never washing out or wearing away, making it the ideal choice where infection control is paramount. Our Copper Nickel range of ironmongery is manufactured using a 70-30 copper-nickel alloy, which makes the range tarnish-resistant and will not oxidize and patinate like pure copper. Note - only 'touch-point' items will be made from Copper Nickel. This includes Pull Handles, Push Plates, Lever Handles, Escutcheons and Bathroom Thumbturns. Where an ironmongery set is specified as Copper Nickel, all 'non-touch-point' items will be Stainless Steel. Please also note, Digi-Locks are not available in Copper Nickel.

# Intumescent Jackets

Many ironmongery components will require 1mm or 2mm intumescent protection around the hardware in order to protect the cut-out in the door leaf in the event of a fire. These components are not listed in the ironmongery sets but the correct intumescent products are included automatically based on the fire rating of the door. This makes it simpler when selecting your ironmongery - you tell us what ironmongery set you want, and we take care of the intumescent if required!





## Fire Signage

Under building regulations, all fire doors must be fitted with mandatory fire signage. There are numerous types of mandatory signage, and the exact sign required depends on the type of door, and also depends on what other hardware is being fitted to the doorset. Mandatory fire signage is not listed in the ironmongery sets as this is required in order to meet building regulations, but it will automatically be included according to the fire rating of the doorset, and according to the other hardware items on the door.



## Pivots

The **LSDA & LUDA** Door Systems require the doors to be hung on pivots rather than standard hinge in order to allow the door to swing in both directions. Where doors are NFR, a free-swing pivot will be used. We use a fully adjustable high quality pivot designed for commercial environments. Where doors are FD30 or FD60 – a Floor Spring will be used (see below)



## Floor Springs

Where **LSDA & LUDA** Door Systems are FD30 or FD60, the doors must be fitted with a closing device – just like any other fire rated door. We use universal non-handed floor springs which conform to EN 1154. These are designed for door weights of up to 120kg. These floor springs also feature hydraulically fully controlled closing cycle and backcheck function.



## Emergency Release Door Stop

All LSDA and LUDA Door Systems are supplied with Emergency Release Door Stops. These are designed to be fitted into the head or jamb of the frame and act as a door stop for the door to close. However, in the event of an emergency, the pin can be depressed allowing the door to open in reverse.



## LSDA Ironmongery Sets (Lamdoor, Single Door, Double Swing, Ambulant WC)

Handle Type	Locking & Release	Closer Type	Image	Application / Description	Set No.	Set contents
Lever handle	Bathroom & Emergency Release Stop	Pivot		Ambulant WC (Allows reverse opening in the event of an emergency)	017	Lever Handle, Thumbturn, Bathroom Lock, Floor Spring (if door is Fire Rated, Free Swing Pivot if NFR), Emergency Release Door Stop, Floor Door Stop, Kickplates

## LUDA Ironmongery Sets (Lamdoor, Unequal Pair, Double Swing, Ambulant WC)

Handle Type	Locking & Release	Closer Type	Image	Application / Description	Set No.	Set contents
Lever handle	Bathroom & Emergency Release Stop	Pivot		Ambulant WC (Allows reverse opening in the event of an emergency)	024	Lever Handle, Thumbturn, Bathroom Lock, Floor Spring (if door is Fire Rated, Free Swing Pivot if NFR), Emergency Release Door Stop, Floor Door Stops, Flush Bolt, Kickplates

**Note:** All sets will include the relevant intumescent and fire signage based on the fire rating of the door. See notes on page 7

## Fire & Smoke Seals

As standard, Intumescent Brush strips are fitted to all doors, and plain intumescent strips are used where two Brush strips would conflict – i.e. on the meeting stiles of a pair of doors. All strips are supplied in either Black or White, as standard.




## Threshold Seals

No threshold seals are used on our **LSDA** or **LUDA** door systems.

Door Handings

Door handings refer to the side of the door where the pivots are when viewing the ‘pull-side’ of the door. (This applies to the normal opening direction of the door – not the opening direction when being opened in reverse). Unequal pairs refer to the large leaf

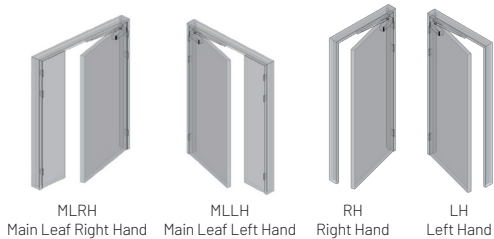

Overhead Panels

Not applicable to the LSDA or LUDA door systems.

Sidescreen Panels

Not applicable to the LSDA or LUDA door systems.

Air Transfer Grilles

Air movement in a building is important. Grilles are often fitted into walls and ceilings, but sometimes they need to be fitted in doors. However, fire and smoke travels wherever there’s air movement! Our intumescent air transfer grilles create the perfect solution by expanding to form a solid block in the event of a fire, in order to stop fire spreading. Air transfer grilles are available on any of the LSDA or LUDA systems in NFR, FD30 or FD60 rating. (Note Air Transfer Grilles are not suitable for smoke rated doors – i.e. FD30s or FD60s.)



	Swing Type	Door Configuration	SYSTEM CODE	Durability	Warranty	Fire Ratings	Flush Glaze Available?	Priviglaze Available	Priviglaze+ Available	No. of Finishes Choices	Additional PVC Protection available	OHP Available	Sidescreen Available
--	------------	--------------------	-------------	------------	----------	--------------	------------------------	----------------------	-----------------------	-------------------------	-------------------------------------	---------------	----------------------

Dfendoor	Single Swing	Single Door	DSS	Severe Duty	10 years	NFR, FD30, FD60	✓	✓	✓	24	✓	✓	✓
		Unequal Pair	DUS	Severe Duty	10 years	NFR, FD30, FD60	✓	✓	✓	24	✓	✓	✓
		Double Door	DDS	Severe Duty	10 years	NFR, FD30, FD60	✓	✓	✓	24	✓	✓	✓
	Double Swing	Single Door	DSD	Severe Duty	10 years	NFR, FD30, FD60	✓	✓	✓	24	✓	✓	✓
		Unequal Pair	DUD	Severe Duty	10 years	NFR, FD30, FD60	✓	✓	✓	24	✓	✓	✓
		Double Door	DDD	Severe Duty	10 years	NFR, FD30, FD60	✓	✓	✓	24	✓	✓	✓
	Ambulant WC	Single Door	DSDA	Severe Duty	10 years	NFR, FD30, FD60				24	✓		
		Unequal Pair	DUDA	Severe Duty	10 years	NFR, FD30, FD60				24	✓		

Lamdoor <small>(limited door sizes available - Max leaf size =2100 x 950mm)</small>	Single Swing	Single Door	LSS	Medium Duty	5 years	NFR, FD30, FD60				7		✓	✓
		Unequal Pair	LUS	Medium Duty	5 years	NFR, FD30, FD60				7		✓	✓
		Double Door	LDS	Medium Duty	5 years	NFR, FD30, FD60				7		✓	✓
	Double Swing	Single Door	LSD	Medium Duty	5 years	NFR, FD30, FD60				7		✓	✓
		Unequal Pair	LUD	Medium Duty	5 years	NFR, FD30, FD60				7		✓	✓
		Double Door	LDD	Medium Duty	5 years	NFR, FD30, FD60				7		✓	✓
	Ambulant WC <small>(This Data Sheet)</small>	Single Door	LSDA	Medium Duty	5 years	NFR, FD30, FD60				7			
		Unequal Pair	LUDA	Medium Duty	5 years	NFR, FD30, FD60				7			



SDS

SPECIALIST DOOR  
SOLUTIONS

For further information, contact us:

T 01420 543222

E [sales@specialistdoorsolutions.com](mailto:sales@specialistdoorsolutions.com)

Unit 1 Bordon Trading Estate, Old Station Way, Bordon, Hampshire GU35 9HH

[specialistdoorsolutions.com](http://specialistdoorsolutions.com)