



Lamdoor

Single Swing Door Systems


LSS

- Lamdoor
- Single Door
- Single Swing



LUS

- Lamdoor
- Unequal Pair
- Single Swing

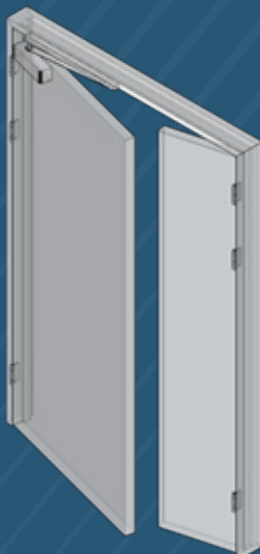

LDS

- Lamdoor
- Double Door
- Single Swing



SDS Door System Explained

Every year thousands of brand-new fire doors have their certification invalidated from the moment they are fitted! Mostly this happens inadvertently but is hardly surprising when you consider that a compliant fire door is not just a door and frame. In order for a fire door to be compliant – the door leaf, the glazing, the door frame, the ironmongery, the fixings, the fire stopping materials, the intumescent products and the fire signage must not only be compatible, but must also be backed up with fire test evidence to prove the use of all components when fitted together. The most common mistake amongst the fire industry is to assume that an individual component with fire test evidence can automatically be fitted to a fire door. Sadly, this is not the case, and as a result many fire doors – although they are made up of fire rated components – are not fire compliant as a complete assembly.

At Specialist Door Solutions, we have created a number of Door Systems which have been compiled based on our experience in the industry and are designed to offer a one-stop solution for compliant high-performance doorsets comprising of doors, frames, vision panels and ironmongery solutions, all of which are fully backed up by the relevant test data and certification.



The LSS, LUS & LDS Door Systems

The **LSS, LUS & LDS** Door Systems are all single swing doorsets. They are hung on hinges and are designed to open in one direction only.

The **LSS, LUS & LDS** Door Systems are all part of the Lamdoor range of doors. The SDS Lamdoor plugs the gap between a traditional Laminate faced door and the SDS Dfendoor, offering a long lasting yet commercially viable alternative.

The SDS Lamdoor range has a very comprehensive range of glazing options, colour options, door leaf sizes, and also offers the ability to customise with items such as edge protectors and kickplates. These details are explained in more detail in the following pages.

Operational / Warranty

An incredibly resilient, hard wearing, and hygienic doorset. Lamdoor doors are supplied encapsulated with 1.5mm thick PVC, and are designed for less demanding healthcare environments, pharmaceutical, hospitality, retail and education sectors. Supplied with 5 Year Warranty.

Fire Rating Options

- NFR – No Fire Rating
- FD30 – 30 Mins Fire Resistance
- FD30s – 30 Mins Fire & Smoke Resistance
- FD60 – 60 Mins Fire Resistance
- FD60s – 60 Mins Fire & Smoke Resistance

Acoustic Performance

- 0 – 20dB – without any acoustic seals
- 21 – 32dB – with the addition of batwing & dropdown seals
- 33 – 35dB – with the addition of batwing & dropdown seals and a 54mm core
- 35 – 40dB – available with use of a specialist acoustic core (NFR only)

Enviromental

Formaldehyde Release Rating Class E1, according to BS EN 13986 (2004).
FSC Certified – Certificate Registration No. SA-COC-005235.




Maximum Leaf Sizes

Here are the maximum leaf sizes available for the **LSS, LUS & LDS** Door systems. These sizes are based on our primary fire test evidence.

Maximum sizes are noted for both the width and height of the door, as the width and height of a door are relative to each other. A very wide door is restricted by height, and a very tall door is restricted in width.

When a fire test is carried out – a door without a lock or latch is considered more onerous than a door with a latch. The reason for this is that the latch serves to hold the door in the closed position against the pressure build up within the furnace. This therefore creates two categories of permissible door sizes – those tested with a latch and those tested without a latch:

Note: **LUS** door sizes refer to the main leaf

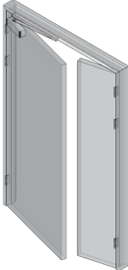		Height	Width
LSS Doors 	NFR - With or Without Latch	2100	950
	FD30 - With or Without Latch	2100	950
	FD60 - With or Without Latch	2100	950
LUS Doors 	NFR - With or Without Latch	2100	950
	FD30 - With or Without Latch	2100	950
	FD60 - With or Without Latch	2100	950
LDS Doors 	NFR - With or Without Latch	2100	950
	FD30 - With or Without Latch	2100	950
	FD60 - With or Without Latch	2100	950


Vision Panels

All of the following vision panel options are available on the **LSS, LUS & LDS** Door Systems. Vision panels are supplied fully factory fitted, and will be supplied as follows;



LSS Doors

Vision Panel of choice



LUS Doors

Vision Panel of choice is supplied in the main leaf only




LDS Doors

Vision Panel of choice is supplied in both door leaves

The following configurations are available providing a number of different size and layout options. These options have been compiled following many years of experience in the industry. Those noted with 'Part M' below comply with the Building Regulations Approved Document Part M (BS8300) – Minimum Zones of Visibility, and the Equality Act (EA) 2010.


VPA1

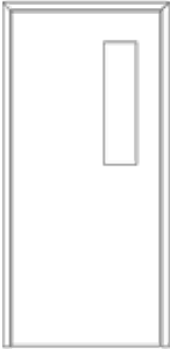

VPA1 = 750 x 200mm
(150mm From Door Edge)

VPA1A = 750 x 200mm
(200mm From Door Edge)


VPA2

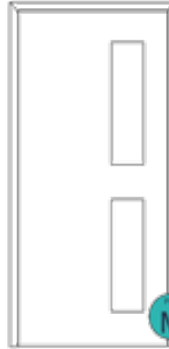

VPA2 = 750 & 688 x 200mm
(150mm From Door Edge)

VPA2A = 750 & 688 x 200mm
(200mm From Door Edge)


VPA3

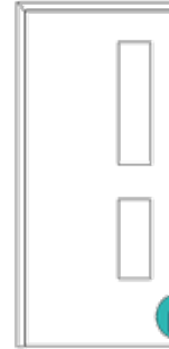

VPA3 = 750 & 488 x 200mm
(150mm From Door Edge)

VPA3A = 750 & 488 x 200mm
(200mm From Door Edge)


VPA4

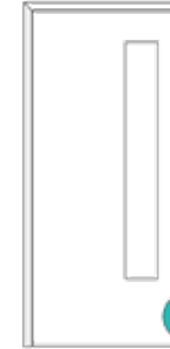

VPA4 = 1450 x 200mm
(150mm From Door Edge)

VPA4A = 1450 x 200mm
(200mm From Door Edge)


VPA5



VPA5 = 1650 x 200mm
(150mm From Door Edge)

VPA5A = 1650 x 200mm
(200mm From Door Edge)


VPA9



VPA9 = 300 x 300mm
(Central on Door Width)


VPA9A = 350 x 350mm
(Central on Door Width)

VPA10



VPA10 = 408 x 408mm
(Central on Door Width)


VPA11

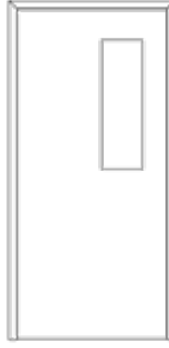

VPA11 = 805 x 255mm
(150mm From Door Edge)


VPA11A = 805 x 255mm
(200mm From Door Edge)

VPA12

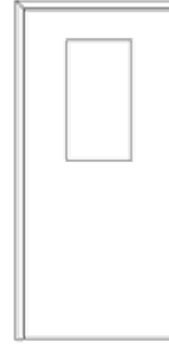


VPA12 = 750 x 400mm
(Central on Door Width)

VPA13

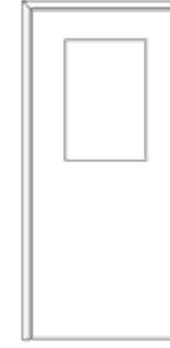

VPA13 = 750 x 500mm
(Central on Door Width)


VPA17



VPA17 = 1355 x 255mm
(150mm From Door Edge)

VPA17 = 1355 x 255mm
(200mm From Door Edge)

VPA18

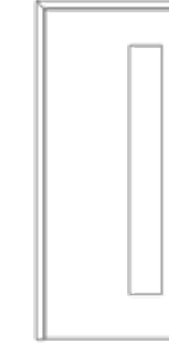





VPA18 = 1550 x 200mm
(150mm From Door Edge)

VPA18 = 1550 x 200mm
(200mm From Door Edge)

Glass Types

All of the following glass types are available on the **LSS, LUS & LDS** Door Systems (noting size restrictions below). These are available in NFR or fire rated options, and also for acoustic or non-acoustic doors. Simply select a glass type, and we will take care of ensuring that the correct variation of the following glass types, matches up with the desired fire and/or acoustic rating. Since glazing within doors is categorised as glazing within ‘Critical Locations’ under Building Regulations, all glass types will conform to British Standard BS 6262: Part 4: 1994.


Name	Clearglaze	Frostglaze
		
Comments	The most common type of glazing. Available either as a single glass pane, or as a double glazed unit finishing flush with both faces of the door.	Glass can be frosted for privacy if required. Available either as a single glass pane, or as a double glazed unit finishing flush with both faces of the door.
Beading System <small>(see below for more details)</small>	Timber Bead 	Timber Bead 
Size Options	Available in all vision panel sizes	Available in all vision panel sizes

Beading Types

The following beading option is available on the **LSS, LUS & LDS** Door Systems, which is fitted with the relevant glazing seals as standard to ensure fire integrity and acoustic properties are maintained.

Timber Bead

A traditional ‘Bolection’ style wooden bead. These are available in a choice of timber types and available either lacquered or primed ready for site decoration.





Door Edges

All door edges on the **LSS, LUS & LDS** Door Systems are Postformed. This means that the PVC sheets on the faces of the doors are heated up and formed around the edges of the door. This provides the ultimate solution for both impact protection and hygiene, as there are no joints, no unprotected edges, and no loose components. The joint between the two faces of PVC is fitted with an intumescent strip.



Frame Types

The following frame types are available on the **LSS, LUS & LDS** Door Systems;

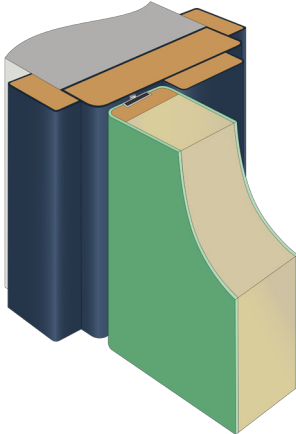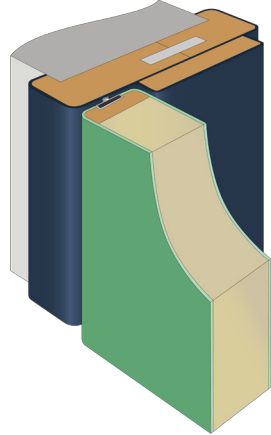Frame Type	Image	Comments	Notes	Wall Depths
Traditonal Frame		Our most common frame type, comprising of separate door stops and architraves.	This frame type allows for the frame fixings to be positioned behind the doorstops. The architraves and doorstops are supplied with loose PVC covers. This means that the PVC covers can be applied after the architraves and doorstops are fitted giving a completely fixing-free finish.	90 - 190mm Extension lining available for reveals deeper than 190mm
Split Frame		This frame option is made up of two sections with a joining tongue in between. The architraves are integral and the doorstop is separate.	This frame type with its integral architraves, means that the door sits proud of the wall in line with the architraves. The frame fixings can be placed behind the doorstop, and the doorstop has a loose PVC cover like the Traditional Frame. The finished result gives a fixing-free finish.	90 - 190mm Additional fillet frame section available for reveals deeper than 190mm

Finishes

All of the following colours are available on the **LSS, LUS & LDS** Door Systems. Doors and frames can be in the same colour, or in contrasting colours.

Woodgrains




American White Oak LRV: 43
Ellmau Beech: LRV 46

Coloured Finishes



Flint: LRV 21: RAL 7037
Gunpowder: LRV 51: RAL 7035
Snowflake: LRV 81: RAL 9003

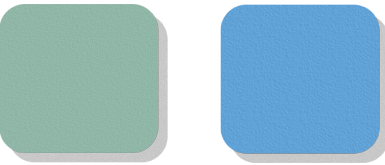

Jade: LRV 36
Lupin: LRV 23: RAL 5024

Ironmongery Sets

There’s no hiding it – ironmongery is sometimes one of the most complicated aspects of a doorset. Apart from ensuring all components of an ironmongery set are compatible – there’s also Fire Regulations, Fire Certification, HTM Compliance, DDA Compliance and Building Regulations to consider!

Here at Specialist Door Solutions we have combined our many years of experience with doors and ironmongery in the healthcare sector, and created an industry pioneering range of ‘Standard Ironmongery Sets’. All of these standard sets are 100% compliant with all of the above mentioned regulations, and are designed to take the hard work out of choosing ironmongery – whilst still offering a huge range of options.

Here’s a few notes about what’s in these sets, and on the following pages you will find full details of the ironmongery sets, listed under the relevant Door Systems.

Ironmongery Finishes

We offer our ironmongery sets in 3 finishes – each designed to offer different levels of hygiene. All of these different finishes are brushed stainless steel in appearance making them visually the same. This makes it possible to mix-and-match different ironmongery finishes in different areas of a project, according to the clinical sensitivity of the room/area.

- Define Range – Stainless Steel

Made from Stainless Steel – this is our Go-To option for most doorsets. Stainless Steel is extremely tough and offers excellent corrosion resistance to most oxidising acids making it easy to sanitise – ideal for the rigorous demands of hospital environments.

- Define+ Range – Anti-Microbial


A range of ironmongery with an Anti-Microbial coating containing silver ions. The silver ions in the coating continuously fight against harmful bacteria by disrupting the bacteria’s metabolism which inhibits its survival and reproduction. The coating is extremely tough and remains operative even when subjected to the normal cleaning regimes of a hospital. Note – only ‘touch-point’ items will be coated. This includes Pull Handles, Push Plates, Lever Handles, Escutcheons and Bathroom Thumbturns. Where an ironmongery set is specified as Anti-Microbial, all ‘non-touch-point’ items will be Stainless Steel. Please also note, Digi-Locks are not available in Anti-Microbial finish.

- Define Copper Range – Copper Nickel

A range of ironmongery made from solid copper alloy. The key difference with this range is that it is not coated – it is made from solid copper alloy which continuously kills 99.9% of harmful bacteria, whilst maintaining the clinical aesthetic of stainless steel. Copper is the first and only elemental solid surface material registered with the U.S. Environmental Protection Agency to actively kill bacteria. The antibacterial properties work 24/7, never washing out or wearing away, making it the ideal choice where infection control is paramount. Our Copper Nickel range of ironmongery is manufactured using a 70-30 copper-nickel alloy, which makes the range tarnish-resistant and will not oxidize and patinate like pure copper. Note – only ‘touch-point’ items will be made from Copper Nickel. This includes Pull Handles, Push Plates, Lever Handles, Escutcheons and Bathroom Thumbturns. Where an ironmongery set is specified as Copper Nickel, all ‘non-touch-point’ items will be Stainless Steel. Please also note, Digi-Locks are not available in Copper Nickel.


Lock Profile Options

We offer our lockcases & cylinders in two profile options – Oval or Euro profile. Euro profile is the default choice as this is the most common in the UK. Oval profile is available on request.



Intumescent Jackets

Many ironmongery components will require 1mm or 2mm intumescent protection around the hardware in order to protect the cut-out in the door leaf in the event of a fire. These components are not listed in the ironmongery sets but the correct intumescent products are included automatically based on the fire rating of the door. This makes it simpler when selecting your ironmongery – you tell us what ironmongery set you want, and we take care of the intumescent if required!



Fire Signage

Under building regulations, all fire doors must be fitted with mandatory fire signage. There are numerous types of mandatory signage, and the exact sign required depends on the type of door, and also depends on what other hardware is being fitted to the doorset. Mandatory fire signage is not listed in the ironmongery sets as this is required in order to meet building regulations, but it will automatically be included according to the fire rating of the doorset, and according to the other hardware items on the door.



Door Closers

We use Slide Arm Cam Action Door Closers. These are available in surface mounted, or concealed options. Cam Action Door Closers use a ‘cam and follower’ mechanism which means a much lower resistance when opening the door, when compared to Scissor Arm Closers, and also offering premium closing force and control. This makes them the first choice for meeting the requirements of Approved Document M + BS 8300. In addition the slide arm provides a very aesthetically pleasing finish, with less protruding parts which are prone to damage.



EMHO Door Closers

EMHO stands for Electro Magnetic Hold Open. Under BS 476: Part 22 - all fire rated doors into a room, or on a corridor must be fitted with a door closer to ensure that the doors are held in the closed position. Under no circumstances must a fire door be kept in the open position, unless fitted with an EMHO closer. An EMHO closer is designed to be linked to the fire alarm, and the closer contains a magnetic device which holds the door in the open position. In the event of the fire alarm being activated, the closer will automatically release the doors.

Hinges

All of our **LSS, LUS and LDS** doors will be supplied with extremely high quality concealed bearing hinges. These hinges utilise advanced polymer bushes to provide an oil free, maintenance free hinge. These hinges have been tested to the European Standard EN1935, and meet the highest grade possible – Grade 14. Our hinges are designed to take door weights of up to 160kg and have been independently tested to over 1,000,000 cycles.





















LSS Ironmongery Sets (Lamdoor, Single Door, Single Swing)

Handle Type	Locking Option	Closer Type	Image	Typical Room Types	Set NO.	Set contents
Pull Handle and Push Plate	Non Locking	Slide Arm Closer		Multiple	005	Push Plate, Pull Handle, Slide Arm Closer*, Kickplates (*option to change to automatic door opener)
				Multiple (EHMO)	006	Push Plate, Pull Handle, EMHO Slide Arm Closer, Floor Door Stop, Kickplates
				WC Circulation	009	Push Plate, Pull Handle, Slide Arm Closer, Unisex WC Sign, Kickplates
				Male WC Circulation	010	Push Plate, Pull Handle, Slide Arm Closer, Male WC Sign, Kickplates
				Female WC Circulation	011	Push Plate, Pull Handle, Slide Arm Closer, Female WC Sign, Kickplates
		Concealed Closer		Multiple	034	Push Plate, Pull Handle, Concealed Closer, Door Floor Stop, Kickplates
				Multiple (EHMO)	035	Push Plate, Pull Handle, EMHO Concealed Closer, Door Floor Stop, Kickplates
	Deadlock	Slide Arm Closer		Multiple	005-L	Push Plate, Pull Handle, Slide Arm Closer, Escutcheon, Cylinder, Deadlock, Kickplates
				Multiple (EHMO)	006-L	Push Plate, Pull Handle, EMHO Slide Arm Closer, Escutcheon, Cylinder, Deadlock, Floor Door Stop, Kickplates
Cylinder Pull	Deadlock	Concealed Closer		Multiple	034-L	Push Plate, Pull Handle, Concealed Closer, Escutcheon, Cylinder, Deadlock, Floor Door Stop, Kickplates
				Multiple (EHMO)	035-L	Push Plate, Pull Handle, EMHO Slide Arm Closer, Concealed Closer, Escutcheon, Cylinder, Deadlock, Floor Door Stop, Kickplates
		No Closer		Riser/Service Duct	019-L	Escutcheon, Cylinder Pull, Cylinder, Deadlock, Kickplates
Lever Handle	Sashlock	Slide Arm Closer (Only if Fire Rated)		Multiple	007-L	Lever Handle, Escutcheon, Slide Arm Closer (included if door is Fire Rated), Cylinder, Sashlock, Floor Door Stop (unless door closer included), Kickplates
	Latch	Slide Arm Closer (Only if Fire Rated)		Multiple	008	Lever Handle, Latch, Slide Arm Closer (included if door is Fire Rated), Floor Door Stop (unless door closer included), Kickplates
	Bathroom	Slide Arm Closer (Only if Fire Rated)		WC	012	Closer (included if door is Fire Rated), Floor Door Stop (unless door closer included), Unisex WC Sign,
				Male WC	013	Closer (included if door is Fire Rated), Floor Door Stop on non closer doors, Male WC Sign, Kickplates
				Female WC	014	Closer (included if door is Fire Rated), Floor Door Stop on non closer doors, Female WC Sign, Kickplates
				Shower	015	Closer (included if door is Fire Rated), Floor Door Stop on non closer doors, Shower Sign, Kickplates
				Dis. WC	016	Closer (included if door is Fire Rated), Floor Door Stop on non closer doors, Disabled WC Sign, Kickplates
	Digi Lock	Slide Arm Closer (Only if Fire Rated)		Multiple	020	Codelock, Slide Arm Closer (included if door is Fire Rated), Floor Door Stop (unless door closer included), Kickplates
				Male Changing Rm.	022	Codelock, Slide Arm Closer (included if door is Fire Rated), Floor Door Stop (unless door closer included), Male WC Sign, Kickplates
				Female Changing Rm.	023	Codelock, Slide Arm Closer included if door is Fire Rated, Floor Door Stop (unless door closer included), Female WC Sign, Kickplates













Note: All sets will include the relevant intumescent and fire signage based on the fire rating of the door. See notes on page 9 and 10

LUS Ironmongery Sets (Lamdoor, Unequal Pair, Single Swing)

Handle Type	Locking Option	Closer Type	Image	Typical Room Types	Set NO.	Set contents
	Non Locking	Slide Arm Closer		Multiple	003	Push Plate Pull Handle Scissor Arm Closer* Flush Bolt, Kickplates (*Option to change to Automatic Door Opener)
				Multiple (EMHO)	004	Push Plate, Pull Handle, EMHO Slide Arm Closer, Flush Bolt, Floor Mounted Door Stop, Kickplates
		Concealed Closer		Multiple	032	Push Plate, Pull Handle, Concealed Closer, Flush Bolt, Floor Mounted Door Stop, Kickplates
				Multiple (EMHO)	033	Push Plate, Pull Handle, EMHO Concealed Closer, Flush Bolt, Floor Mounted Door Stop, Kickplates
	Deadlock	Slide Arm Closer			003-L	Push Plate, Pull Handle, Escutcheon, Cylinder, Deadlock, Flush Bolt, Slide Arm Closer,, Kickplates
					004-L	Push Plate, Pull Handle, Escutcheon, Cylinder, Deadlock, Flush Bolt, EMHO Slide Arm Closer, Floor Mounted Door Stop, Kickplates
	Deadlock	Concealed Closer			032-L	Push Plate, Pull Handle, Escutcheon, Cylinder, Deadlock, Flush Bolt, Concealed closer, Floor Mounted Door Stop, Kickplates
					033-L	Push Plate, Pull Handle, Escutcheon, Cylinder, Deadlock, Flush Bolt, EMHO Concealed closer, Floor Mounted Door Stop, Kickplates
	Bathroom	Slide Arm Closer (Only if Fire Rated)		WC	025	Lever Handle, Latch, Thumbturn, Bathroom Lock, Flush Bolt, Slide Arm Closer (included if door is Fire Rated), Floor Door Stop (unless door closer (included), Unisex WC Sign, Kickplates
	Latch	Slide Arm Closer (Only if Fire Rated)		Multiple	026	Lever Handle, Latch, Slide Arm Closer (included if door is Fire Rated), Floor Door Stop (unless door closer (included), Unisex WC Sign, Kickplates
	Sashlock	Slide Arm Closer (Only if Fire Rated)		Multiple	027-L	Lever Handle, Escutcheon, Cylinder , Sashlock, Flush Bolt, Slide Arm Closer (included if door is Fire Rated), Floor Door Stop (unless door closer (included), Kickplates
						
		Slide Arm Closer (Only if Fire Rated)		Multiple	021	Flush Bolt, Slide Arm Closer (included if door is Fire Rated), Kickplates, Code lock
						

Note: All sets will include the relevant intumescent and fire signage based on the fire rating of the door. See notes on page 9 and 10

LDS Ironmongery Sets (Lamdoor, Double Door, Single Swing)

Handle Type	Locking Option	Closer Type	Image	Typical Room Types	Set NO.	Set contents
	Non Locking	Slide Arm Closer		Multiple	001	Push Plate Pull Handle Slide Arm Closer* Flush Bolt, Kickplates (*Option to change to Automatic Door Opener)
				Multiple (EMHO)	002	Push Plate, Pull Handle, EMHO Slide Arm Closer, Floor Mounted Door Stop, Kickplates
		Concealed Closer		Multiple	030	Push Plate, Pull Handle, Concealed Closers, Floor Mounted Door Stop, Kickplates
				Multiple (EMHO)	031	Push Plate, Pull Handle, EMHO Concealed Closers, Floor Mounted Door Stop, Kickplates
	Deadlock	Slide Arm Closer		Multiple	001-L	Push Plate, Pull Handle, Slide Arm Closer, Escutcheon, Cylinder, Deadlock, Flush Bolt, Floor Mounted Door Stop, Kickplates
				Multiple (EMHO)	002-L	Push Plate, Pull Handle, EMHO Slide Arm Closer, Escutcheon, Cylinder, Deadlock, Flush Bolt, Floor Mounted Door Stop, Kickplates
	Deadlock	Concealed Closer		Multiple	030-L	Push Plate, Pull Handle, Concealed Closers, Escutcheon, Cylinder, Deadlock, Flush Bolt, Floor Mounted Door Stop, Kickplates
				Multiple (EMHO)	031-L	Push Plate, Pull Handle, EMHO Concealed Closers, Escutcheon, Cylinder, Deadlock, Flush Bolt, Floor Mounted Door Stop, Kickplates
	Deadlock	No closer		Riser/Service Duct	018-L	Escutcheon, Cylinder Pull, Cylinder, Deadlock, Flush Bolt, Kickplates
	Digi Lock	Slide Arm Closer (Only if Fire Rated)		Multiple	021	Flush Bolt, Slide Arm Closer (included if door is Fire Rated), Kickplates, Code lock

Note: All sets will include the relevant intumescent and fire signage based on the fire rating of the door. See notes on page 9 and 10


Fire & Smoke Seals

As standard, Intumescent Brush strips are fitted to all doors, and plain intumescent strips are used where two Brush strips would conflict - i.e. on the meeting stiles of a pair of doors. All strips are supplied in either Black or White, as standard.




Threshold Seals

Where FD30s or FD60s doors are required for smoke control, the doors must have a maximum gap of 3mm under the door leaves in order to comply. Practically - a 3mm gap is very hard to achieve without the doors binding or scraping on the floor, and therefore by default we use a dropseal in the base of the door where smoke control is required. A dropseal is automatically activated when the door is in the closed position, and seals against the floor. By using a dropseal - the gap under the doors can be increased up to 10mm giving a more realistic door-to-floor clearance, but still achieving the requirements of BS 476-31.1: 1983. Dropseals are also fitted to acoustic rated doors where required.



Door Handings

Door handings refer to the side of the door where the hinges are, when viewing the hinge knuckle side ('pull-side') of the door. Unequal pairs of doors refer to the large leaf. Double door handings refer to the main leaf.

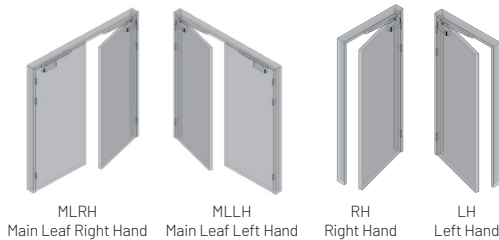


Overhead Panels

Solid or Glazed overhead panels are available on the **LSS, LUS & LDS** Door Systems. Glass panels can be either clear or frosted, and Solid panels can be in the same colour or a contrasting colour to the door leaves.



Sidescreen Panels

Solid or Glazed Sidescreen panels are available on the **LSS, LUS & LDS** Door Systems. Glass panels can be either clear or frosted, and Solid panels can be in the same colour or a contrasting colour to the door leaves.



Air Transfer Grilles

Air movement in a building is important. Grilles are often fitted into walls and ceilings, but sometimes they need to be fitted in doors. However, fire and smoke travels wherever there's air movement! Our intumescent air transfer grilles create the perfect solution by expanding to form a solid block in the event of a fire, in order to stop fire spreading. Air transfer grilles are available on any of the **LSS, LUS and LDS** systems in NFR, FD30 or FD60 rating. (Note Air Transfer Grilles are not suitable for smoke rated doors - i.e. FD30s or FD60s.)



	Swing Type	Door Configuration	SYSTEM CODE	Durability	Warranty	Fire Ratings	Flush Glaze Available?	Priviglaze Available	Priviglaze+ Available	No. of Finishes Choices	Additional PVC Protection available	OHP Available	Sidescreen Available
Dfendoor	Single Swing	Single Door	DSS	Severe Duty	10 years	NFR, FD30, FD60	✓	✓	✓	24	✓	✓	✓
		Unequal Pair	DUS	Severe Duty	10 years	NFR, FD30, FD60	✓	✓	✓	24	✓	✓	✓
		Double Door	DDS	Severe Duty	10 years	NFR, FD30, FD60	✓	✓	✓	24	✓	✓	✓
	Double Swing	Single Door	DSD	Severe Duty	10 years	NFR, FD30, FD60	✓	✓	✓	24	✓	✓	✓
		Unequal Pair	DUD	Severe Duty	10 years	NFR, FD30, FD60	✓	✓	✓	24	✓	✓	✓
		Double Door	DDD	Severe Duty	10 years	NFR, FD30, FD60	✓	✓	✓	24	✓	✓	✓
	Ambulant WC	Single Door	DSDA	Severe Duty	10 years	NFR, FD30, FD60				24	✓		
		Unequal Pair	DUDA	Severe Duty	10 years	NFR, FD30, FD60				24	✓		
Lamdoor (limited door sizes available - Max leaf size =2100 x 950mm)	Single Swing (This Data Sheet)	Single Door	LSS	Medium Duty	5 years	NFR, FD30, FD60				7		✓	✓
		Unequal Pair	LUS	Medium Duty	5 years	NFR, FD30, FD60				7		✓	✓
		Double Door	LDS	Medium Duty	5 years	NFR, FD30, FD60				7		✓	✓
	Double Swing	Single Door	LSD	Medium Duty	5 years	NFR, FD30, FD60				7		✓	✓
		Unequal Pair	LUD	Medium Duty	5 years	NFR, FD30, FD60				7		✓	✓
		Double Door	LDD	Medium Duty	5 years	NFR, FD30, FD60				7		✓	✓
	Double Swing Ambulant WC	Single Door	LSDA	Medium Duty	5 years	NFR, FD30, FD60				7			
		Unequal Pair	LUDA	Medium Duty	5 years	NFR, FD30, FD60				7			



SDS

SPECIALIST DOOR
SOLUTIONS

For further information, contact us:

T 01420 543222

E sales@specialistdoorsolutions.com

Unit 1 Bordon Trading Estate, Old Station Way, Bordon, Hampshire GU35 9HH

specialistdoorsolutions.com