



SDS

Dfendoor

Single Swing Door Systems


DSS

- Dfendoor
- Single Door
- Single Swing



DUS

- Dfendoor
- Unequal Pair
- Single Swing

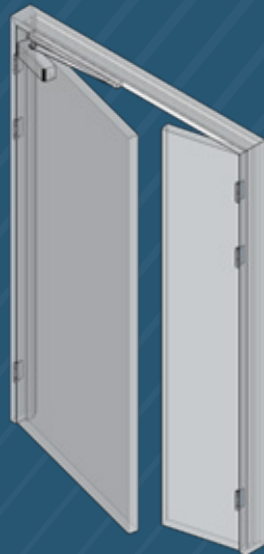

DDS

- Dfendoor
- Double Door
- Single Swing



SDS Door System Explained

Every year thousands of brand-new fire doors have their certification invalidated from the moment they are fitted! Mostly this happens inadvertently but is hardly surprising when you consider that a compliant fire door is not just a door and frame. In order for a fire door to be compliant – the door leaf, the glazing, the door frame, the ironmongery, the fixings, the fire stopping materials, the intumescent products and the fire signage must not only be compatible, but must also be backed up with fire test evidence to prove the use of all components when fitted together. The most common mistake amongst the fire industry is to assume that an individual component with fire test evidence can automatically be fitted to a fire door. Sadly, this is not the case, and as a result many fire doors – although they are made up of fire rated components – are not fire compliant as a complete assembly.

At Specialist Door Solutions, we have created a number of Door Systems which have been compiled based on our experience in the industry and are designed to offer a one-stop solution for compliant high-performance doorsets comprising of doors, frames, vision panels and ironmongery solutions, all of which are fully backed up by the relevant test data and certification.



The DSS, DUS & DDS Door Systems

The **DSS, DUS & DDS** Door Systems are all single swing doorsets. They are hung on hinges and are designed to open in one direction only.

The **DSS, DUS & DDS** Door Systems are all part of the Dfendoor range of doors. The SDS Dfendoor is an incredibly resilient, hard wearing and hygienic doorset, ideal for high-traffic, high-wear hospital environments. As well as being extremely tough, with minimal maintenance requirements compared to timber and laminate products.

The SDS Dfendoor range has a very comprehensive range of glazing options, colour options, door leaf sizes, and also offers the ability to customise with items such as edge protectors and kickplates. These details are explained in more detail in the following pages.

Operational / Warranty

An incredibly resilient, hard wearing, and hygienic doorset. Dfendoor doors are supplied encapsulated with 2mm thick PVC, and are designed for high use in healthcare, pharmaceutical, hospitality, retail and education sectors. Supplied with 5 Year Warranty.

Fire Rating Options

NFR – No Fire Rating

FD30 – 30 Mins Fire Resistance

FD30s – 30 Mins Fire & Smoke Resistance

FD60 – 60 Mins Fire Resistance

FD60s – 60 Mins Fire & Smoke Resistance

Acoustic Performance

0 – 20dB – without any acoustic seals

21 – 32dB – with the addition of batwing & dropdown seals

33 – 35dB – with the addition of batwing & dropdown seals and a 54mm core

35 – 40dB – available with use of a specialist acoustic core (NFR only)

Enviromental

Formaldehyde Release Rating Class E1, according to BS EN 13986 (2004).

FSC Certified – Certificate Registration No. SA-COC-005235.

Durability

Severe Duty Rating. All door cores have been tested to 1,000,000 cycles to BS EN 1191 (with classification according to BS EN 12400). This is the highest grading possible in the British Standard of Mechanical Tests for 'hinged or pivoted doors. Judged on how they perform in tests, door assemblies are awarded one of four classifications, ranging from Light, Medium or Heavy to Severe Duty. In independent tests, These door cores achieved SEVERE DUTY – the highest grading possible in the British Standard of Mechanical Tests for 'hinged or pivoted doors'.



Maximum Leaf Sizes

Here are the maximum leaf sizes available for the **DSS, DUS & DDS** Door systems. These sizes are based on our primary fire test evidence.

Maximum sizes are noted for both the Width and Height of the door, as the width and height of a door are relative to each other. A very wide door is restricted by height, and a very tall door is restricted in width.

When a fire test is carried out – a door without a lock or latch is considered more onerous than a door with a latch. The reason for this is that the latch serves to hold the door in the closed position against the pressure build up within the furnace. This therefore creates two categories of permissible door sizes – those tested with a latch and those tested without a latch:


Note: DUS door sizes refer to the main leaf		Widest Option:		Tallest Option:	
		Height	Width	Height	Width
DSS Doors 	NFR - No Latch	3000	1180	3000	1180
	NFR - With Latch	3000	1180	3000	1180
	FD30 - No Latch	2360	1180	2932	1075
	FD30 - With Latch	2360	1180	2982	1075
	FD60 - No Latch	2360	1104	2519	1028
	FD60 - With Latch	2360	1129	2569	1028

DUS Doors 	NFR - No Latch	3000	1180	3000	1180
	NFR - With Latch	3000	1180	3000	1180
	FD30 - No Latch	2360	1180	2932	1075
	FD30 - With Latch	2360	1180	2982	1075
	FD60 - No Latch	2360	1104	2519	1028
	FD60 - With Latch	2360	1129	2569	1028

DDS Doors 	NFR - No Latch	3000	1180	3000	1180
	NFR - With Latch	3000	1180	3000	1180
	FD30 - No Latch	2360	1180	2932	1075
	FD30 - With Latch	2360	1180	2982	1075
	FD60 - No Latch	2360	1104	2519	1028
	FD60 - With Latch	2360	1129	2569	1028


Vision Panels

All of the following vision panel options are available on the **DSS, DUS & DDS** Door Systems. Vision panels are supplied fully factory fitted, and will be supplied as follows;




DSS Doors

Vision Panel of choice



DUS Doors

Vision Panel of choice is supplied in the main leaf only.



DDS Doors

Vision Panel of choice is supplied in both door leaves.

The following configurations are available providing a number of different size and layout options. These options have been compiled following many years of experience in the industry. Those noted with 'Part M' below comply with the Building Regulations Approved Document Part M (BS8300) – Minimum Zones of Visibility, and the Equality Act (EA) 2010.

VPA1



VPA1 = 750 x 200mm
(150mm From Door Edge)
VPA1A = 750 x 200mm
(200mm From Door Edge)

VPA2




VPA2 = 750 & 688 x 200mm
(150mm From Door Edge)
VPA2A = 750 & 688 x 200mm
(200mm From Door Edge)

VPA3




VPA3 = 750 & 688 x 200mm
(150mm From Door Edge)
VPA3A = 750 & 688 x 200mm
(200mm From Door Edge)

VPA4




VPA4 = 1450 x 200mm
(150mm From Door Edge)
VPA4A = 1450 x 200mm
(200mm From Door Edge)

VPA5




VPA5 = 1650 x 200mm
(150mm From Door Edge)
VPA5A = 1650 x 200mm
(200mm From Door Edge)

VPA9




VPA9 = 300 x 300mm
(Central on Door Width)
VPA9A = 350 x 350mm
(Central on Door Width)

VPA10




VPA10 = 408 x 408mm
(Central on Door Width)

VPA11




VPA11 = 805 x 255mm
(150mm From Door Edge)
VPA11A = 805 x 255mm
(200mm From Door Edge)

VPA12




VPA12 = 750 x 400mm
(Central on Door Width)

VPA13



VPA13 = 750 x 500mm
(Central on Door Width)

VPA17



VPA17 = 1355 x 255mm
(150mm From Door Edge)
VPA17 = 1355 x 255mm
(200mm From Door Edge)












VPA18



VPA18 = 1550 x 200mm
(150mm From Door Edge)
VPA18 = 1550 x 200mm
(200mm From Door Edge)


Glass Types

All of the following glass types are available on the **DSS, DUS & DDS** Door Systems (noting size restrictions below). These are available in NFR or fire rated options, and also for acoustic or non-acoustic doors. Simply select a glass type, and we will take care of ensuring that the correct variation of the following glass types, matches up with the desired fire and/or acoustic rating. Since glazing within doors is categorised as glazing within 'Critical Locations' under Building Regulations, all glass types will conform to British Standard BS 6262: Part 4: 1994.

Name	Clearglaze		Frostglaze		Priviglaze		Priviglaze+
							
Comments	The most common type of glazing. Available either as a single glass pane, or as a double glazed unit finishing flush with both faces of the door.		Glass can be frosted for privacy if required. Available either as a single glass pane, or as a double glazed unit finishing flush with both faces of the door.		A double glazed unit incorporating an integral blind. Available with PVC beading, or finishing flush with both faces of the door.		A double glazed unit finishing flush with both faces of the door, incorporating an integral blind & LED Warning light.
Beading System (see below for more details)	PVC Bead	Flush	PVC Bead	Flush	PVC Bead	Flush	Flush
							
Size Options	Available in all vision panel sizes		Available in all vision panel sizes		Available in VP10 & VP11		Available in VP10 & VP11

Beading Types

The following beading options are available on the **DSS, DUS & DDS** Door Systems, both of which are fitted with the relevant glazing seals as standard to ensure fire integrity and acoustic properties are maintained. As standard, all fixing points are concealed.



PVC Bead

Our most common beading system - providing excellent aesthetics and also minimal edges for infection control. Bead covers are available in matching or contrasting colours to the door leaf finish.




Flush

Where infection control is paramount, this option provides a second-to-none solution. The PVC door faces are entirely flush with the vision panel, with only a silicone joint between the PVC and the glass.

Door Edges

All door edges on the **DSS, DUS & DDS** Door Systems are Postformed. This means that the PVC sheets on the faces of the doors are heated up and formed around the edges of the door. This provides the ultimate solution for both impact protection and hygiene, as there are no joints, no unprotected edges, and no loose components. The joint between the two faces of PVC is fitted with an intumescent strip.



Frame Types


The following frame types are available on the **DSS, DUS & DDS** Door Systems;

Frame Type	Image	Comments	Notes	Wall Depths
Traditonal Frame	A 3D perspective view of a traditional door frame. It shows a dark blue door with a light-colored PVC sheet. The frame consists of separate door stops and architraves, which are shown in a light tan color. The door is shown in a slightly open position, revealing the internal structure.	Our most common frame type, comprising of separate door stops and architraves.	This frame type allows for the frame fixings to be positioned behind the doorstops. The architraves and doorstops are supplied with loose PVC covers. This means that the PVC covers can be applied after the architraves and doorstops are fitted giving a completely fixing-free finish.	90 - 160mm Extension lining available for deeper reveals up to 300mm
Split Frame	A 3D perspective view of a split door frame. It shows a dark blue door with a light-colored PVC sheet. The frame consists of two sections with a joining tongue in between. The architraves are integral to the door, and the doorstop is separate. The door is shown in a slightly open position, revealing the internal structure.	This frame option is made up of two sections with a joining tongue in between. The architraves are integral and the doorstop is separate.	This frame type with its integral architraves, means that the door sits proud of the wall in line with the architraves. The frame fixings can be placed behind the doorstop, and the doorstop has a loose PVC cover like the Traditional Frame. The finished result gives a fixing-free finish.	90 - 160mm Additional fillet frame section available for deeper reveals up to 300mm

Finishes

All of the following colours are available on the **DSS, DUS & DDS** Door Systems. Doors and frames can be in the same colour, or in contrasting colours.

Woodgrains

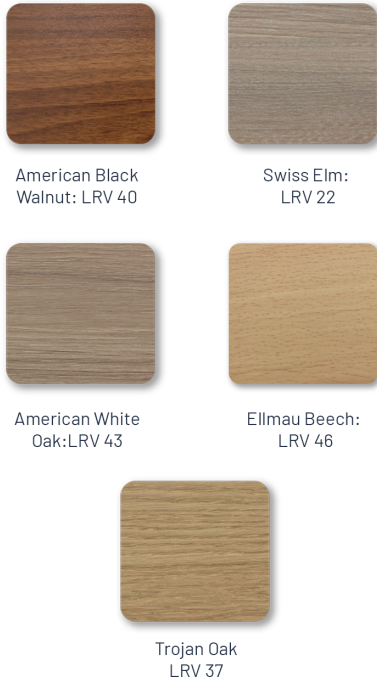

DFend - Textured Finish



Vibrance - High Gloss Finish



Satin Smooth Finish



Vibrance - High Gloss and Satin Smooth ranges are not recommended for high traffic areas

Ironmongery Sets

There's no hiding it - ironmongery is sometimes one of the most complicated aspects of a doorset. Apart from ensuring all components of an ironmongery set are compatible - there's also Fire Regulations, Fire certification, HTM compliance, DDA compliance and Building Regulations to consider!

Here at Specialist Door Solutions we have combined our many years of experience with doors and ironmongery in the healthcare sector, and created an industry pioneering range of 'Standard Ironmongery Sets'. All of these standard sets are 100% compliant with all of the above mentioned regulations, and are designed to take the hard work out of choosing ironmongery - whilst still offering a huge range of options.

Here's a few notes about what's in these sets, and on the following pages you will find full details of the ironmongery sets, listed under the relevant Door Systems.

Ironmongery Finishes

We offer our ironmongery sets in 3 finishes - each designed to offer different levels of hygiene. All of these different finishes are brushed stainless steel in appearance making them visually the same. This makes it possible to mix-and-match different ironmongery finishes in different areas of a project, according to the clinical sensitivity of the room/area.

• Define Range - Stainless Steel

Made from Stainless Steel - this is our Go-To option for most doorsets. Stainless Steel is extremely tough and offers excellent corrosion resistance to most oxidising acids making it easy to sanitise - ideal for the rigorous demands of hospital environments.

• Define⁺ Range - Anti-Microbial


A range of ironmongery with an Anti-Microbial coating containing silver ions. The silver ions in the coating continuously fight against harmful bacteria by disrupting the bacteria's metabolism which inhibits its survival and reproduction. The coating is extremely tough and remains operative even when subjected to the normal cleaning regimes of a hospital. Note - only 'touch-point' items will be coated. This includes Pull Handles, Push Plates, Lever Handles, Escutcheons and Bathroom Thumbturns. Where an ironmongery set is specified as Anti-Microbial, all 'non-touch-point' items will be Stainless Steel. Please also note, Digi-Locks are not available in Anti-Microbial finish.

• Define Copper Range - Copper Nickel

A range of ironmongery made from solid copper alloy. The key difference with this range is that it is not coated - it is made from solid copper alloy which continuously kills 99.9% of harmful bacteria, whilst maintaining the clinical aesthetic of stainless steel. Copper is the first and only elemental solid surface material registered with the U.S. Environmental Protection Agency to actively kill bacteria. The antibacterial properties work 24/7, never washing out or wearing away, making it the ideal choice where infection control is paramount. Our Copper Nickel range of ironmongery is manufactured using a 70-30 copper-nickel alloy, which makes the range tarnish-resistant and will not oxidize and patinate like pure copper. Note - only 'touch-point' items will be made from Copper Nickel. This includes Pull Handles, Push Plates, Lever Handles, Escutcheons and Bathroom Thumbturns. Where an ironmongery set is specified as Copper Nickel, all 'non-touch-point' items will be Stainless Steel. Please also note, Digi-Locks are not available in Copper Nickel.


Lock Profile Options

We offer our lockcases & cylinders in two profile options - Oval or Euro profile. Euro profile is the default choice as this is the most common in the UK. Oval profile is available on request.



Intumescent Jackets

Many ironmongery components will require 1mm or 2mm intumescent protection around the hardware in order to protect the cut-out in the door leaf in the event of a fire. These components are not listed in the ironmongery sets but the correct intumescent products are included automatically based on the fire rating of the door. This makes it simpler when selecting your ironmongery - you tell us what ironmongery set you want, and we take care of the intumescent if required!



Fire Signage

Under building regulations, all fire doors must be fitted with mandatory fire signage. There are numerous types of mandatory signage, and the exact sign required depends on the type of door, and also depends on what other hardware is being fitted to the doorset. Mandatory fire signage is not listed in the ironmongery sets as this is required in order to meet building regulations, but it will automatically be included according to the fire rating of the doorset, and according to the other hardware items on the door.



Door Closers

We use Slide Arm Cam Action Door closers. These are available in surface mounted, or concealed options. Cam Action door closers use a 'cam and follower' mechanism which means a much lower resistance when opening the door, when compared to Scissor Arm Closers, and also offering premium closing force and control. This makes them the first choice for meeting the requirements of Approved Document M + BS 8300. In addition the slide arm provides a very aesthetically pleasing finish, with less protruding parts which are prone to damage.



EMHO Door Closers

EMHO stands for Electro Magnetic Hold Open. Under BS 476: Part 22 - all fire rated doors into a room, or on a corridor must be fitted with a door closer to ensure that the doors are held in the closed position. Under no circumstances must a fire door be kept in the open position, unless fitted with an EMHO closer. An EMHO closer is designed to be linked to the fire alarm, and the closer contains a magnetic device which holds the door in the open position. In the event of the fire alarm being activated, the closer will automatically release the doors.























Hinges

All of our **DSS, DUS and DDS** doors will be supplied with extremely high quality concealed bearing hinges. These hinges utilise advanced polymer bushes to provide an oil free, maintenance free hinge. These hinges have been tested to the European Standard EN1935, and meet the highest grade possible - Grade 14. Our hinges are designed to take door weights of up to 160kg and have been independently tested to over 1,000,000 cycles.


















DSS Ironmongery Sets (Dfendoor, Single Door, Single Swing)

Handle Type	Locking Option	Closer Type	Image	Application / Description	Set No.	Set Contents
	Non Locking			Multiple	005	Push Plate, Pull Handle, Slide Arm Closer*, Kickplates (*Option to change to Automatic Door Opener)
				Multiple (EMHO)	006	Push Plate, Pull Handle, EMHO Slide Arm Closer, Floor Door Stop, Kickplates
				WC Circulation	009	Push Plate, Pull Handle, Slide Arm Closer, Unisex WC Sign, Kickplates
				Male WC Circulation	010	Push Plate, Pull Handle, Slide Arm Closer, Male WC Sign, Kickplates
				Female WC Circulation	011	Push Plate, Pull Handle, Slide Arm Closer, Female WC Sign, Kickplates
	Deadlock			Multiple	034	Push Plate, Pull Handle, Concealed Closer, Floor Door Stop, Kickplates
				Multiple (EMHO)	035	Push Plate, Pull Handle, EMHO Concealed Closer, Floor Door Stop, Kickplates
				Multiple	005-L	Push Plate, Pull Handle, Slide Arm Closer, Escutcheon, Cylinder, Deadlock, Kickplates
	Deadlock			Multiple (EMHO)	006-L	Push Plate, Pull Handle, EMHO Slide Arm Closer, Escutcheon, Cylinder, Deadlock, Floor Door Stop, Kickplates
				Multiple	034-L	Push Plate, Pull Handle, Concealed Closer, Escutcheon, Cylinder, Deadlock, Floor Door Stop, Kickplates
				Multiple (EMHO)	035-L	Push Plate, Pull Handle, EMHO Concealed Closer, Escutcheon, Cylinder, Deadlock, Floor Door Stop, Kickplates
	Deadlock	No Closer		Riser/Service Duct	019-L	Escutcheon, Cylinder Pull, Cylinder, Deadlock, Kickplates
	Sashlock			Multiple	007-L	Lever Handle, Escutcheon, Slide Arm Closer (included if door is Fire Rated), Cylinder, Sashlock, Floor Door Stop (unless door closer included), Kickplates
				Multiple	008	Lever Handle, Latch, Slide Arm Closer (included if door is Fire Rated), Floor Door Stop (unless door closer included), Kickplates
	Latch			WC	012	Closer (included if door is Fire Rated), Floor Door Stop (unless door closer included), Unisex WC Sign,
				Male WC	013	Closer (included if door is Fire Rated), Floor Door Stop on non closer doors, Male WC Sign, Kickplates
	Bathroom			Female WC	014	Closer (included if door is Fire Rated), Floor Door Stop on non closer doors, Female WC Sign, Kickplates
				Shower	015	Closer (included if door is Fire Rated), Floor Door Stop on non closer doors, Shower Sign, Kickplates
				Dis. WC	016	Closer (included if door is Fire Rated), Floor Door Stop on non closer doors, Disabled WC Sign, Kickplates
	Digi Lock			Multiple	020	Codelock, Slide Arm Closer (included if door is Fire Rated), Floor Door Stop (unless door closer included), Kickplates
				Male Changing Rm.	022	Codelock, Slide Arm Closer (included if door is Fire Rated), Floor Door Stop (unless door closer included), Male WC Sign, Kickplates
				Female Changing Rm.	023	Codelock, Slide Arm Closer (included if door is Fire Rated), Floor Door Stop (unless door closer included), Female WC Sign, Kickplates














Note: All sets will include in the relevant intumescent and fire signage based on the fire rating of the door. See notes on page 10

DUS Ironmongery Sets (Dfendoor, Unequal Pair, Single Swing)

Handle Type	Locking Option	Closer Type	Image	Application / Description	Set No.	Set Contents
	Non locking	Slide Arm Closer		Multiple	003	Push Plate, Pull Handle, Slide Arm Closer*, Flush Bolt, Kickplates (*Option to change to Automatic Door Opener)
		Slide Arm Closer		Multiple (EMHO)	004	Push Plate, Pull Handle, EMHO Slide Arm Closer, Flush Bolt, Floor Mounted Door Stop, Kickplates
		Concealed Closer		Multiple	032	Push Plate, Pull Handle, Concealed Closer, Flush Bolt, Floor Mounted Door Stop, Kickplates
		Concealed Closer		Multiple (EMHO)	033	Push Plate, Pull Handle, EMHO Concealed Closer, Flush Bolt, Floor Mounted Door Stop, Kickplates
	Deadlock	Slide Arm Closer		Multiple	003-L	Push Plate, Pull Handle, Escutcheon, Cylinder, Deadlock, Flush Bolt, Slide Arm Closer, Kickplates
		Slide Arm Closer		Multiple (EMHO)	004-L	Push Plate, Pull Handle, Escutcheon, Cylinder, Deadlock, Flush Bolt, EMHO Slide Arm Closer, Floor Mounted Door Stop, Kickplates
		Concealed Closer		Multiple	032-L	Push Plate, Pull Handle, Escutcheon, Cylinder, Deadlock, Flush Bolt, Concealed Closer, Floor Mounted Door Stop, Kickplates
		Concealed Closer		Multiple (EMHO)	033-L	Push Plate, Pull Handle, Escutcheon, Cylinder, Deadlock, Flush Bolt, EMHO Concealed Closer, Floor Mounted Door Stop, Kickplates
	Bathroom	Slide Arm Closer (Only if Fire Rated)		WC	025	Lever Handle, Thumbturn, Bathroom Lock, Flush Bolt, Slide Arm Closer (included if door is Fire Rated), Floor Door Stop (unless door closer included), Unisex WC Sign, Kickplates
	Latch	Slide Arm Closer (Only if Fire Rated)		Multiple	026	Lever Handle, Latch, Slide Arm Closer (included if door is Fire Rated), Flush Bolt, Floor Door Stop (unless door closer included), Kickplates
	Sashlock	Slide Arm Closer (Only if Fire Rated)		Multiple	027-L	Lever Handle, Escutcheon, Cylinder, Sashlock, Flush Bolt, Slide Arm Closer (included if door is Fire Rated), Floor Door Stop (unless door closer included), Kickplates
		Slide Arm Closer (Only if Fire Rated)		Multiple	021	Flush Bolt, Slide Arm Closer (included if door is Fire Rated), Kickplates, Codelock

Note: All sets will include in the relevant intumescent and fire signage based on the fire rating of the door. See notes on page 10


DDS Ironmongery Sets (Dfendoor, Double Door, Single Swing)

Handle Type	Locking Option	Closer Type	Image	Application / Description	Set No.	Set Contents
	Non Locking	Slide Arm Closer		Multiple	001	Push Plates, Pull Handles, Slide Arm Closers*, Kickplates (*Option to change to Automatic Door Openers)
				Multiple (EMHO)	002	Push Plates, Pull Handles, EMHO Slide Arm Closers, Floor Mounted Door Stop, Kickplates
		Concealed Closer		Multiple	030	Push Plates, Pull Handles, Concealed Closers, Floor Mounted Door Stop, Kickplates
				Multiple (EMHO)	031	Push Plates, Pull Handles, EMHO Concealed Closers, Floor Mounted Door Stop, Kickplates
	Deadlock	Slide Arm Closer		Multiple	001-L	Push Plates, Pull Handles, Slide Arm Closers, Escutcheon, Cylinder, Deadlock, Flush Bolt, Kickplates,
				Multiple (EMHO)	002-L	Push Plates, Pull Handles, EMHO Slide Arm Closers, Escutcheon, Cylinder, Deadlock, Flush Bolt, Floor Mounted Door Stop, Kickplates
		Concealed Closer		Multiple	030-L	Push Plates, Pull Handles, Concealed Closers, Escutcheon, Cylinder, Deadlock, Flush Bolt, Floor Mounted Door Stop, Kickplates
				Multiple (EMHO)	031-L	Push Plates, Pull Handles, EMHO Concealed Closers, Escutcheon, Cylinder, Deadlock, Flush Bolt, Floor Mounted Door Stop, Kickplates
	Deadlock	No Closer		Riser/Service Duct	018-L	Escutcheon, Cylinder Pull, Cylinder, Deadlock, Flush Bolt, Kickplates
		Slide Arm Closer (Only if Fire Rated)		Multiple	021	Flush Bolt, Slide Arm Closers (included if door is Fire Rated), Kickplates, Code Lock

Note: All sets will include in the relevant intumescent and fire signage based on the fire rating of the door. See notes on page 10


Additional PVC Protection – Kickplates

Whilst PVC encapsulated doors are arguably the most durable option for internal healthcare doorsets – some clients like to add additional PVC kickplates to the face of the doors in order to provide enhanced protection, and/or to provide a contrasting colour feature. PVC Kickplates are available flushed into the face of the door (providing flushed in PVC Edge Protectors are also fitted), or as surface mounted kickplates. The beauty of surface mounted PVC kickplates is that they are fully replaceable, and unlike Stainless Steel kickplates – there are no size restrictions on fire rated doors.



Additional PVC Protection – Edge Protectors

PVC Edge Protectors are often used where the door and frame are similar in colour, to provide a contrasting colour to one or both door edges. The Building Regulations Approved Document Part M (BS 8300-2:2018), states that the presence of doors, whether open or closed, should be apparent to visually impaired people through the careful choice of colour and material for the door and its surroundings. This document also states that all Internal doors should be identifiable and contrast visually with the surrounding wall and floor finishes, achieving at least 30 points LRV. PVC Edge Protectors are available in any of the colours listed above and are supplied flushed into the face of the door for infection control purposes, and in order to simplify the fitting of the ironmongery




Fire & Smoke Seals

As standard, Intumescent Brush strips are fitted to all doors, and plain intumescent strips are used where two Brush strips would conflict – i.e. on the meeting stiles of a pair of doors. All strips are supplied in either Black or White, as standard.




Threshold Seals

Where FD30s or FD60s doors are required for smoke control, the doors must have a maximum gap of 3mm under the door leaves in order to comply. Practically – a 3mm gap is very hard to achieve without the doors binding or scraping on the floor, and therefore by default we use a dropseal in the base of the door where smoke control is required. A dropseal is automatically activated when the door is in the closed position, and seals against the floor. By using a dropseal – the gap under the doors can be increased up to 10mm giving a more realistic door-to-floor clearance, but still achieving the requirements of BS 476-31.1: 1983. Dropseals are also fitted to acoustic rated doors where required.



Door Handings

Door handings refer to the side of the door where the hinges are, when viewing the hinge knuckle side ('pull-side') of the door. Unequal pairs of doors refer to the large leaf. Double door handings refer to the main leaf.

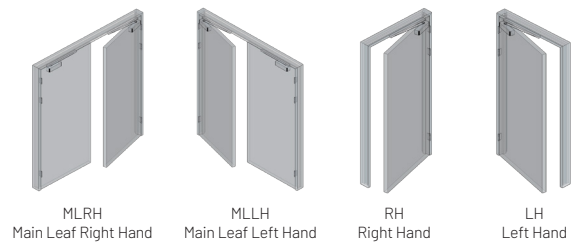


Overhead Panels

Solid or Glazed overhead panels are available on the **DSS, DUS & DDS** Door Systems. Glass panels can be either clear or frosted, and Solid panels can be in the same colour or a contrasting colour to the door leaves.



Sidescreen Panels

Solid or Glazed Sidescreen panels are available on the **DSS, DUS & DDS** Door Systems. Glass panels can be either clear or frosted, and Solid panels can be in the same colour or a contrasting colour to the door leaves.



Air Transfer Grilles

Air movement in a building is important. Grilles are often fitted into walls and ceilings, but sometimes they need to be fitted in doors. However, fire and smoke travels wherever there's air movement! Our intumescent air transfer grilles create the perfect solution by expanding to form a solid block in the event of a fire, in order to stop fire spreading. Air transfer grilles are available on any of the **DSS, DUS and DDS** systems in NFR, FD30 or FD60 rating. (Note Air Transfer Grilles are not suitable for smoke rated doors – i.e. FD30s or FD60s.)



	Swing Type	Door Configuration	SYSTEM CODE	Durability	Warranty	Fire Ratings	Flush Glaze Available?	Priviglaze Available	Priviglaze+ Available	No. of Finishes	Additional PVC Protection	OHP Available	Sidescreen Available
--	------------	--------------------	-------------	------------	----------	--------------	------------------------	----------------------	-----------------------	-----------------	---------------------------	---------------	----------------------

Dfendoor	Single Swing (This Data Sheet)	Single Door	DSS	Severe Duty	5 years	NFR, FD30, FD60	✓	✓	✓	45	✓	✓	✓
		Unequal Pair	DUS	Severe Duty	5 years	NFR, FD30, FD60	✓	✓	✓	45	✓	✓	✓
		Double Door	DDS	Severe Duty	5 years	NFR, FD30, FD60	✓	✓	✓	45	✓	✓	✓
	Double Swing	Single Door	DSD	Severe Duty	5 years	NFR, FD30, FD60	✓	✓	✓	45	✓	✓	✓
		Unequal Pair	DUD	Severe Duty	5 years	NFR, FD30, FD60	✓	✓	✓	45	✓	✓	✓
		Double Door	DDD	Severe Duty	5 years	NFR, FD30, FD60	✓	✓	✓	45	✓	✓	✓
	Ambulant WC	Single Door	DSDA	Severe Duty	5 years	NFR, FD30, FD60				45	✓		
		Unequal Pair	DUDA	Severe Duty	5 years	NFR, FD30, FD60				45	✓		
	Lead Lined	Single Door	DLSS	Severe Duty	5 years	NFR, FD30, FD60	✓	✓	✓	45	✓		
		Unequal Pair	DLUS	Severe Duty	5 years	NFR, FD30, FD60	✓	✓	✓	45	✓		
		Double Door	DLDS	Severe Duty	5 years	NFR, FD30, FD60	✓	✓	✓	45	✓		

Lamdoor (limited door sizes available - Max leaf size =2100 x 950mm)	Single Swing	Single Door	LSS	Medium Duty	2 years	NFR, FD30, FD60				7		✓	✓
		Unequal Pair	LUS	Medium Duty	2 years	NFR, FD30, FD60				7		✓	✓
		Double Door	LDS	Medium Duty	2 years	NFR, FD30, FD60				7		✓	✓
	Double Swing	Single Door	LSD	Medium Duty	2 years	NFR, FD30, FD60				7		✓	✓
		Unequal Pair	LUD	Medium Duty	2 years	NFR, FD30, FD60				7		✓	✓
		Double Door	LDD	Medium Duty	2 years	NFR, FD30, FD60				7		✓	✓
	Double Swing Ambulant WC	Single Door	LSDA	Medium Duty	2 years	NFR, FD30, FD60				7			
		Unequal Pair	LUDA	Medium Duty	2 years	NFR, FD30, FD60				7			



SDS

SPECIALIST DOOR
SOLUTIONS

For further information, contact us:

T 01420 543222

E sales@specialistdoorsolutions.com

Unit 1 Bordon Trading Estate, Old Station Way, Bordon, Hampshire GU35 9HH

specialistdoorsolutions.com